

DIN ISO 5746

DIN

ICS 25.140.30

Supersedes
DIN ISO 5746:1994-09

**Pliers and nippers –
Engineer’s and “Lineman’s” pliers –
Dimensions and test values (ISO 5746:2004)
English version of DIN ISO 5746:2006-09**

Greif- und Schneidzangen –
Kombinationszangen und Kabelzangen –
Maße und Prüfwerte (ISO 5746:2004)
Englische Fassung DIN ISO 5746:2006-09

Document comprises 9 pages

Contents

	Page
National foreword	2
National Annex NA (informative) Bibliography	3
1 Scope	4
2 Normative references	4
3 Dimensions and test values	4
3.1 Engineer's pliers	6
3.2 Lineman's pliers	8
4 Designation	8
5 Marking	9
Bibliography	9

National foreword

This standard has been prepared by Technical Committee ISO/TC 29 "Small tools", Subcommittee SC 10 "Assembly tools for screws and nuts, pliers and nippers".

The responsible German body involved in its preparation was the *Normenausschuss Werkzeuge und Spannzeuge* (Tools and Clamping Devices Standards Committee), Technical Committee NA 121-09-01 AA *Zangen*.

The DIN Standards corresponding to the International Standards referred to in clause 2 of the ISO Standard are as follows:

ISO 5743 DIN ISO 5743
 ISO 5744 DIN ISO 5744

Amendments

This standard differs from DIN ISO 5746:1994-09 as follows:

- a) The content of the standard has been updated.
- b) A new clause 4 "Designation" has been included.
- c) A new clause 5 "Marking" has been included.
- d) The standard has been editorially revised and the German title has been corrected.

Previous editions

DIN 5244: 1933-10, 1942x-04, 1967-11
 DIN 5245: 1933-10, 1967-11
 DIN ISO 5746: 1994-09

National Annex NA
(informative)

Bibliography

DIN ISO 5743, *Pliers and nippers — General technical requirements*

DIN ISO 5744:2006, *Pliers and nippers — Methods of test*

Pliers and nippers — Engineer's and “Lineman's” pliers — Dimensions and test values

1 Scope

This International Standard specifies the principal dimensions of engineer's and Lineman's pliers and the test values for the pliers in order to verify their aptitude to function in conformity with ISO 5744. General technical requirements are given in ISO 5743.

The engineer's and Lineman's pliers illustrated in this International Standard are examples only and are not intended to affect the manufacturer's design.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5743, *Pliers and nippers — General technical requirements*

ISO 5744:2004, *Pliers and nippers — Methods of test*

3 Dimensions and test values

3.1 Engineer's pliers

The main dimensions of engineer's pliers are shown in Figure 1 and given in Table 1.

Engineer's pliers can be made with or without a joint cutter, at the manufacturer's discretion.


Engineer's pliers shall be tested in accordance with ISO 5744.

After the load test, the permanent set s shall not exceed the value given in Table 2. If distance l_1 is not suitable for the load test, the formula given in ISO 5744:2004, 4.2 shall be used.

The cutting force, F_1 , and the diameter, d , of the test wire shall not exceed the values given in Table 2.

Pliers having a lever ratio differing from the values given in Table 2 shall be checked for compliance using the formula given in ISO 5744:2004, 5.3.2.

Dimensions in millimetres

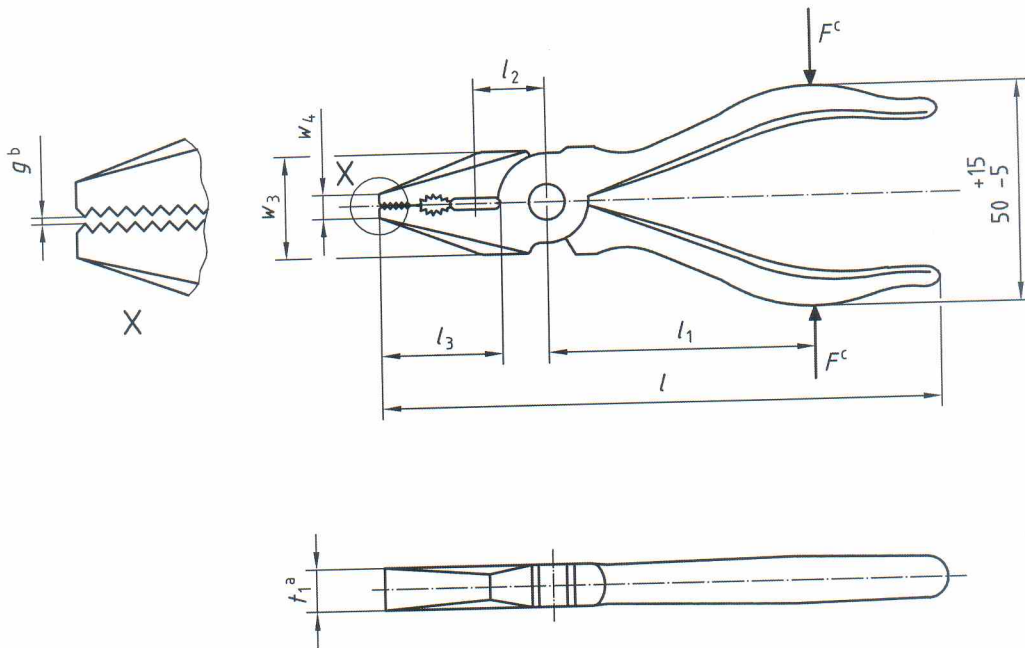

- a The jaws may be tapered to the point over the length l_3 .
- b Measured with pliers closed.
- c F = Load applied in load test or F_1 force applied in cutting test.

Figure 1 — Engineer's pliers

Table 1 — Engineer's pliers, main dimensions

Dimensions in millimetres

l	l_3	w_3 max.	w_4 max.	t_1 max.	g max.
140 ± 8	30 ± 4	23	5,6	10	0,3
160 ± 9	32 ± 5	25	6,3	11,2	0,4
180 ± 10	36 ± 6	28	7,1	12,5	0,4
200 ± 11	40 ± 8	32	8	14	0,5
220 ± 12	45 ± 10	35	9	16	0,5
250 ± 14	45 ± 12	40	10	20	0,6

Table 2 — Engineer's pliers, load and force application, test values

Nominal length l mm	l_1 mm	l_2 mm	Cutting test		Torsion test ^b		Load test	
			Diameter of medium hard test wire d^a mm	Maximum cutting force $F_{1\max}$ N	Torque T N·m	Maximum twist α_{\max}	Load F N	Maximum permanent set s_{\max}^c mm
140	70	14	1,6	580	15	15°	1 000	1
160	80	16	1,6	580	15	15°	1 120	1
180	90	18	1,6	580	15	15°	1 260	1
200	100	20	1,6	580	20	20°	1 400	1
220	110	22	1,6	580	20	20°	1 400	1
250	125	25	1,6	580	20	20°	1 400	1

^a Data for medium hard test wire are given in ISO 5744.

^b The test shall be carried out in accordance with the torsion test for flat nose pliers given in ISO 5744.

^c $s = w_1 - w_2$ (see ISO 5744).

3.2 Lineman's pliers

The main dimensions of engineer's pliers are shown in Figure 2 and given in Table 3.


Lineman's pliers can be made with or without a joint cutter, at manufacturer's discretion.

Lineman's pliers shall be tested in accordance with ISO 5744.

After the load test, the permanent set s shall not exceed the value given in Table 4. If distance l_1 is not suitable for the load test, the formula given in ISO 5744:2004, 4.2 shall be used.

The cutting force, F_1 , and the diameter, d , of the test wire shall not exceed the values given in Table 4.

Pliers having a lever ration differing from the values given in Table 4 shall be checked for compliance using the formula given in ISO 5744:2004, 5.3.2.

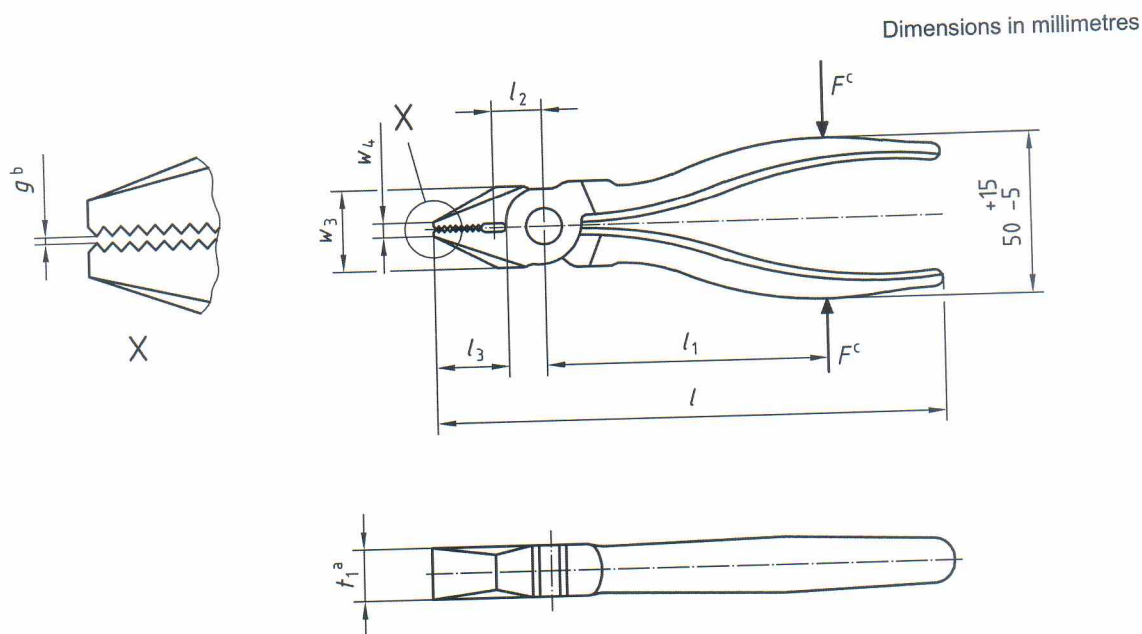

- a The jaws may be tapered to the point over the length l_3 .
- b Measured with pliers closed.
- c F = Load applied in Load test or F_1 force applied in cutting test.

Figure 2 — Lineman's pliers

Table 3 — Lineman's pliers, main dimensions

Dimensions in millimetres

l	l_3	w_3 max.	w_4 max.	l_1 max.	g max.
165 ± 14	32 ± 7	27	9	17	1,1
190 ± 14	33 ± 7	30	9	17	1,1
215 ± 14	38 ± 8	38	10	20	1,3
250 ± 14	40 ± 8	38	10	20	1,3

Table 4 — Lineman's pliers, load and force application, test values

Nominal length			Cutting test		Torsion test ^b		Load test	
			Diameter of medium hard test wire	Maximum cutting force	Torque	Maximum twist	Load	Maximum permanent set
l mm	l_1 mm	l_2 mm	d^a mm	$F_{1 \max}$ N	T N·m	α_{\max}	F N	s_{\max}^c mm
165	90	16	1,6	580	15	15°	1 120	1
190	100	18	1,6	580	15	15°	1 260	1
215	120	20	1,6	580	20	15°	1 400	1
250	140	22	1,6	580	20	15°	1 400	1

- a Data for medium hard test wire are given in ISO 5744.
- b The test shall be carried out in accordance with the torsion test for flat nose pliers given in ISO 5744.
- c $s = w_1 - w_2$ (see ISO 5744).

4 Designation

EXAMPLE 1 Engineer's pliers, number 303 in accordance with ISO 5742, with a nominal length, l , of 160 mm are designated as follows:

Engineer's pliers 303 - ISO 5746 - 160

EXAMPLE 2 "Lineman's" pliers, number 304 in accordance with ISO 5742, with a nominal length, l , of 190 mm are designated as follows:

"Lineman's" pliers 304 - ISO 5746 - 190

5 Marking

Marking shall be in accordance with ISO 5743.

© 2006 Deutsches Institut für Normung e.V. - DIN

Bibliography

- [1] ISO 5742, *Pliers and nippers — Nomenclature*

www.iso.org